

PRINT & CUT MATERIALS

Garment films for producing full colour transfers for use with Solvent and Eco Solvent printers

TO ORDER CALL 01332 85 50 85

Durability may be affected if the original manufacturer recommended ink is not used.

EASY PRINT™



XP3030

50cm wide x 10m rolls

XP3031

50cm wide x 20m rolls

XP3033

75cm wide x 10m rolls

XP3034

75cm wide x 20m rolls

- Matt finish
- Soft and stretchy
- Easy to weed and apply
- Use XP3022 transfer application tape to apply transfers with separate areas

Application

🕒 15 secs

🌡️ 150°C

📏 Medium

🧊 Cold

(hot peel when using application film)

Suitable for

Cotton
Polyester
Poly/cotton

Care

Wash up to 60°C

Dry clean ✗

Tumble dry ✗

Iron ✗

Do not use harsh or bleaching washing materials

Cutting Force

100gf

COLOUR CUT®



XP3001

50cm wide x 5, 10 & 25m rolls

XP3137

75cm wide x 25m rolls

- Semi gloss finish

- Use XP3022 transfer application tape to apply transfers with separate areas

- 12 hour drying time required before heat press application

Application

🕒 15 secs

🌡️ 150°C

📏 Medium

🧊 Cold

(hot peel when using application film)

Suitable for

Cotton
Polyester
Poly/cotton

Care

Wash up to 50°C

Dry clean ✗

Tumble dry ✗

Iron ✗

Do not use harsh or bleaching washing materials

Cutting Force

80 - 100gf

SOLVENT LIGHT



XP3025

matt finish
50cm wide x 25m rolls

XP3026

glossy finish
50cm wide x 25m rolls

XP3138

matt finish
75cm wide x 25m rolls

- For application to white and pastel colours

Application

🕒 15 secs

🌡️ 165°C

📏 Medium

🧊 Cold

Suitable for

Cotton
Polyester
Poly/cotton

Care

Wash up to 80°C

Dry clean ✗

Tumble dry ✗


Iron ✗

Do not use harsh or bleaching washing materials

Cutting Force

60 - 80gf

SUBLI BLOCK

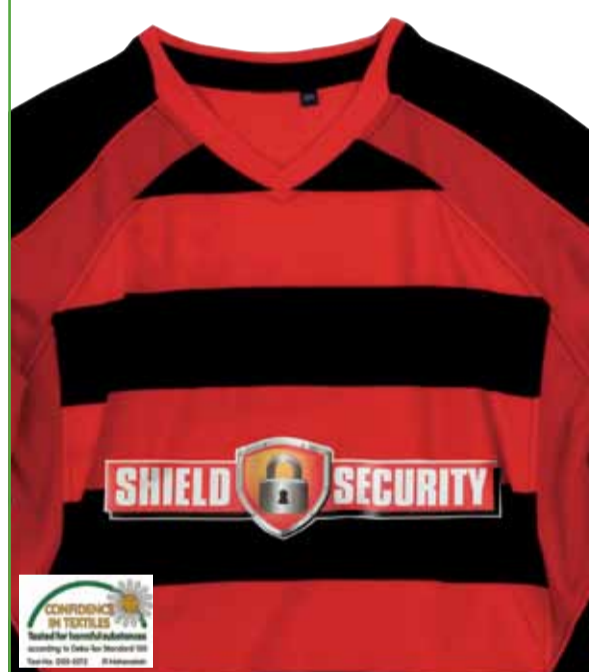

XP3029

50cm wide x 20m rolls

- Eliminates bleed through on football shirts

- Use XP3022 transfer application tape to apply transfers with separate areas

Application

🕒 20 secs

🌡️ 150°C

📏 Medium

🧊 Cold

(hot peel when using application film)

Suitable for

Cotton
Polyester
Poly/cotton

Care

Wash up to 40°C

Dry clean ✗

Tumble dry ✗

Iron ✗

Do not use harsh or bleaching washing materials

Cutting Force

120gf

NYLO PRINT



XP3009A

50cm wide x 5, 10 & 25m rolls

- For application to 100% nylon products

- Use XP3022 transfer application tape to apply transfers with separate areas

- 12 hour drying time required before heat press application

Application

🕒 15 secs

🌡️ 165°C

📏 Medium

🧊 Cold

(hot peel when using application film)

Suitable for

Nylon

Care

Wash up to 40°C inside out

Dry clean ✗

Tumble dry ✗

Iron ✗

Do not use harsh or bleaching washing materials

Cutting Force

80 - 100gf

INK JET DARK



XP3020

50cm wide x 10 & 25m rolls

- Matt finish

Application

🕒 10 secs

🌡️ 160°C

📏 Light

🧊 Cold

(hot peel when using application film)

Suitable for

Cotton
Polyester
Poly/cotton

Care

Wash up to 80°C

Dry clean ✗

Tumble dry ✗

Iron ✗

Do not use harsh or bleaching washing materials

Cutting Force

70 - 90gf